

Static VAR Compensator for PQ Enhancement in Distribution Generation

Mrs. Vijayshree G¹ and Mr. Rafi Ahmed Z²

¹Department of Electrical and Electronics Engineering, DBIT, Bangalore, India
Email :shreechetu@gmail.com

²Department of Electrical and Electronics Engineering, DBIT, Bangalore, India
Email :rafi@dbit.co.in

Abstract—The total requirement for sustainable energy provisions will have increasing important over the years. As the effects of fossil fuels become more apparent and detrimental. Distributed Generation (DG) based scheme on Renewable Energy Technologies (solar, wind, hydro and biomass) are becoming a more important energy option for the future generation system. A common challenge faced by modern electric utilities is to determine how variable generation plants (wind and solar) affect the power system and consequently on the power quality and thus adversely affecting the reliable operation of the electric grid. This paper throws light on how SVCs can be used to improve the power quality (i.e.) related to non-standard voltage, current and frequency at the consumer side which make the system more reliable.

Index Terms— Distributed Generation; Static VAR Compensator (SVC) ; Harmonics; power quality; voltage stability.

I. INTRODUCTION

In today's energy market, Distributed energy systems have an progressively more important role. Conventionally, electricity has been generated in large power stations, sited near resources ; it is elated through a high-voltage transmission grid and is locally circulated through medium-voltage distribution grids. DGs aim to add adaptability of energy sources and also ensure dependability of supply and reduction of greenhouse emissions .DGs can also contribute to the reduction of transmission losses and help to bring in new developments such as fuel cells and super-conducting devices.

The majority of the DG units existing are not incessant generators of energy and naturally make use of solid state power devices as convertors. This obvious inconsistent and nature-dependant generation causes problems related to voltage stability and also the convertors used tend to inject harmonics and source harmonic distortion in the power system. These problems weaken the overall power quality of the system and have undesirable effects on the connected utility.

To overcome this problem related to the power quality, custom power devices(CPD)are introduced. A number of Power quality problem solutions are provided by custom devices. At present, a broad range of flexible AC controllers which are capitalized on recently available power electronic components are emerging for custom power applications.

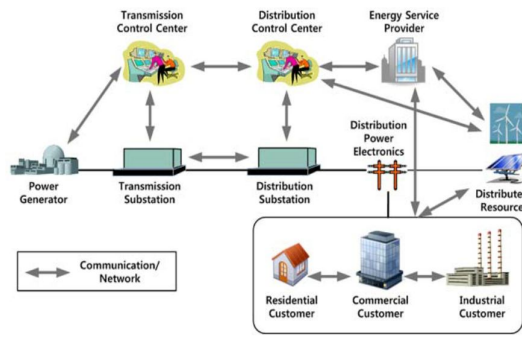


Figure 1: Outline of Distributed generation

Among these Static VAR Compensator (SVCs) has been focused upon in this present work. The distribution system losses and power quality problems are increasing nowadays due to more and more penetration of DGs and consequent injection of harmonics from various power electronic controllers. The main advantages of SVCs are high speed control of reactive power to provide stabilized voltage and also it acts as a shunt harmonic filter.

II.STATIC VAR COMPENSATOR

SVCs provide an excellent source for fast controllable reactive shunt compensation for dynamic voltage control through its use of high-speed thyristor switching/controlled devices. A SVC is typically realized by a coupling Transformer, Thyristor valves, Reactors, and Capacitance.

Fig. 2 illustrate a static VAR compensator. The main objective of SVC is to retain the desired voltage . In steady- state, the SVC will provide some steady- state control of voltage to maintain the highest voltage bus at the pre-defined voltage level. If the bus voltage begins to fall below its set point range, the SVC will inject reactive power into the system , thereby raising the bus voltage into its desired voltage level. If bus voltage increases, the SVC will inject less reactive power, and the result will be to achieve the desired bus voltage.

Static Var Compensators (SVC) are composed of capacitor /filter banks and air-core reactors connected in parallel. The air-core reactors are series connected to thyristors. The current of air-core reactors can be controlled by adjusting the firing angle of thyristors.

The air-core reactor in Static VAR Compensator has high stability and linearity. It is used to absorb reactive power under the control of thyristors. Usually the air-core reactor is series connected to the thyristor valve in delta-connection and then to power grid.

Advantages of SVC:-

- Stabilized energy at the receiving end of long lines.
- Improved efficiency means better utilized capacity.
- Reduced Reactive power consumption, which gives improved tariffs.
- Enables better use of equipment (particularly transformers and cables)
- Reduced voltage fluctuations and light flicker – decreased Harmonic Distortion.

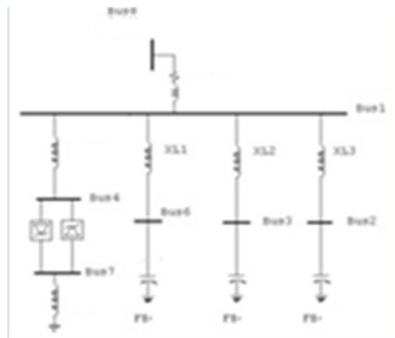


Figure 2:Static VAR Compensator schematic

III. HARMONIC FILTER DESIGN

The “IEEE Guide for Application and Specification of Harmonic Filters” clearly specify and guide for harmonic filter design. In SVC a single tuned shunt filter can be used as a capacitive reactive power generator. Single Shunt filters are made up of capacitor and inductor. The capacitor is designed to withstand the arithmetic sum of the peak voltage of the fundamental and harmonic voltage drop across the capacitor.

The current at the filter is the ratio of voltage impressed on the filter to the total reactance of the tuning inductor and the capacitor. Since the total reactance is less than the capacitive reactance, the fundamental current into the filter will be larger than into the capacitor without the tuning reactor. The harmonic voltage across the capacitor is the voltage, due to the harmonic current, to which the filter is tuned that is available from the system times the reactance of the capacitor at the tuned frequency.

In addition to harmonic filtering, the filter equipment will provide the system with capacitive reactive power that will improve the power factor and help maintain voltage during heavy loads. The reactance of the harmonic filter capacitor is determined by the VAR size of the harmonic filter. The inductive reactance is selected to create a series resonance with the harmonic filter capacitor at the tuned frequency. The series resonance provides a low impedance path to neutral for the harmonics of the system.

$$X_C = \left(\frac{h^2}{h^2-1} \right) X_{eff} \quad (1)$$

Where

$$X_{eff} = \frac{kVLLsys^2}{Q_{eff} (Mvar)} \quad (2)$$

A simple equation to calculate the inductive reactance at power frequency is Equation (3)

$$X_L = \frac{X_C}{h^2} \quad (3)$$

Where,

X_{eff} is the effective reactance of the harmonic filter,

Q_{eff} is the effective reactive power (MVar) of the harmonic filter,

VLLsys is the nominal system line-to-line voltage,

X_C is the capacitive reactance of the harmonic filter capacitor at the fundamental frequency,

X_L is the inductive reactance of the harmonic filter reactor at the fundamental frequency,

h is the harmonic number.

By selecting the tuning frequency, the reactor and capacitor values can be determined. The values obtained from equation (1) and (3) shall be used to design the harmonic filter.

IV. DG SYSTEM MODELLING

In general terms, Distributed Generation (DG) is any type of electrical generator or static inverter producing alternating current that has the capability of parallel operation with the utility distribution system, or is designed to operate separately from the utility system and can feed a load that can also be fed by the utility electrical system.

In here we consider a system where a solar power plant is connected to the utility which is having other small distributed generators along with it. The fluctuating nature of the typical solar power plant from measurements are considered for the study and the parameters considered are as presented in Figure 3 to 6.

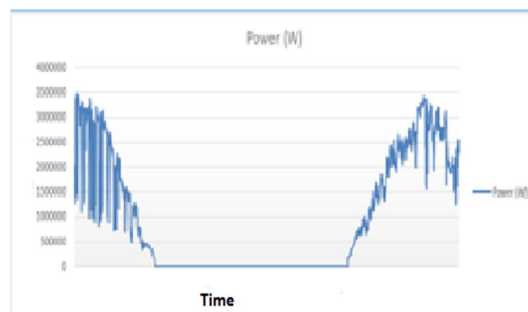


Figure 3: Typical power fluctuation from solar power plant

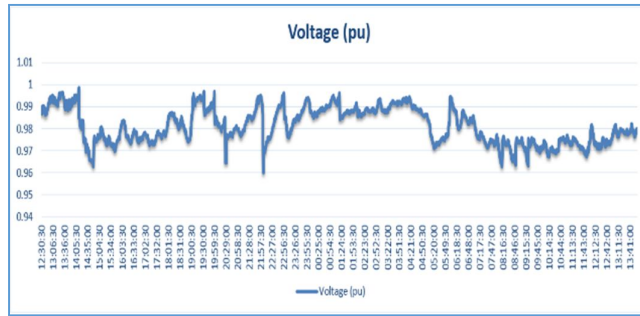


Figure 4: Typical voltage fluctuation at PCC of solar power plant in pu

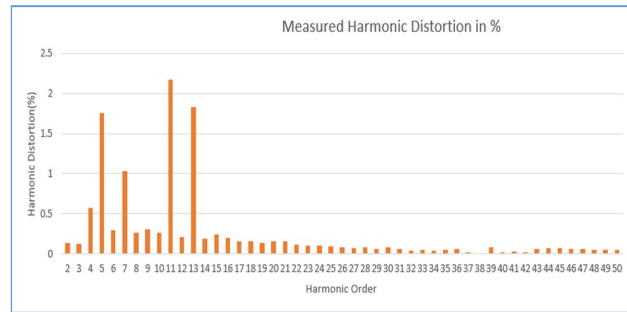


Figure 5: voltage harmonic distortion at PCC of solar power plant in pu

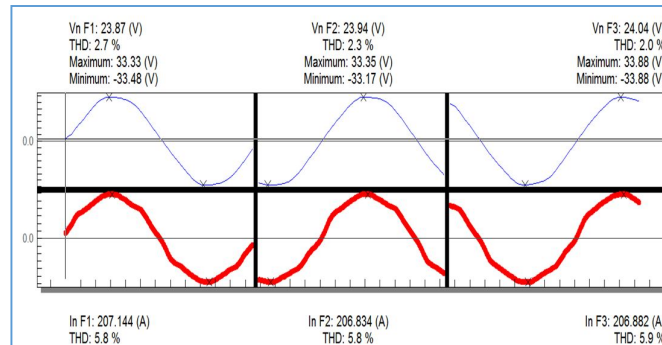


Figure 5: voltage and current waveform at Bus-6

The SVC is modelled with 5th, 7th and 11th order Single Tuned filters as static capacitor and a TSR with a control unit which controls reactive power based on the voltage feedback from SVC connected bus. The lumped utility load is considered at 11kV with 33/11kV interconnecting transformers. All together it is connected to a 132kV Transmission system.

V. SIMULATION AND RESULTS

Simulation of simple distributed generation system with and without SVC is carried out and the results with observation are presented below.

From the simulations we can observe the voltage profile at different buses in the system are enhanced by using a SVC in the network. The harmonic distortion caused due to convertors used in distributed generation system is also reduced by using SVC.

IEEE 519^[13] standard “IEEE Recommended Practices and Requirements for Harmonic Control in Electrical Power Systems” specify the permissible harmonic limits for different voltage levels. Simulated Harmonic distortion results of sample system are presented in below table for with and without SVC in the system.

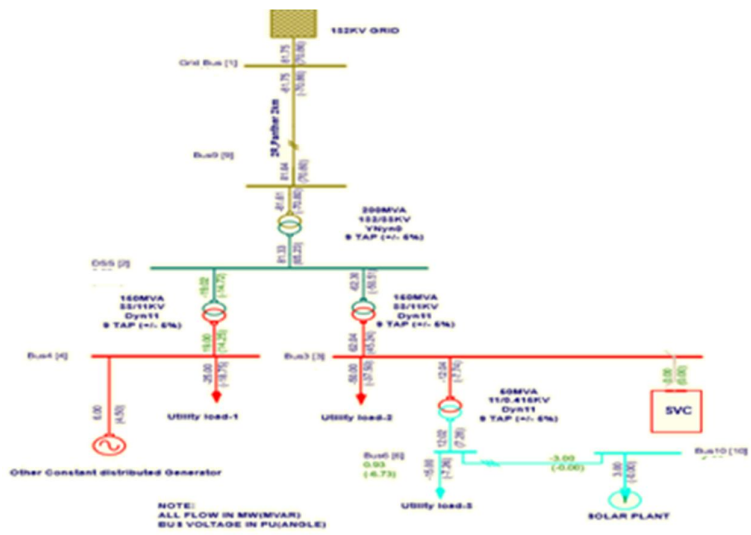


Figure 7: Sample DG system without SVC connected

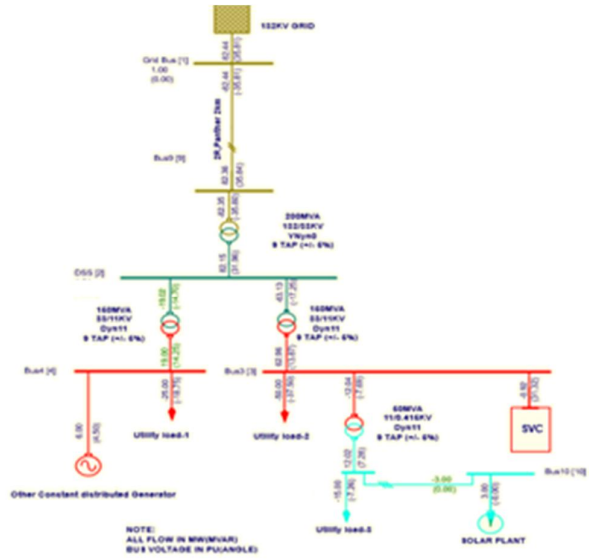


Figure 8: Sample DG system with SVC connected

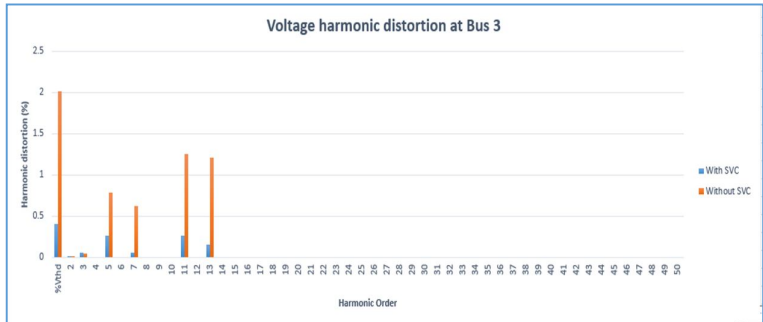


Figure 9: Voltage Harmonic distortion at bus-3 for with and without SVC connected

TABLE I: VOLTAGE PROFILE AT DIFFERENT LOCATION IN SYSTEM

Sl No.	Location	Voltage in Pu	
		without SVC	With SVC
1	Bus 6	0.93	0.97
2	Bus 4	0.97	0.99
3	Bus 3	0.95	0.99
4	Bus 2	0.99	1.01

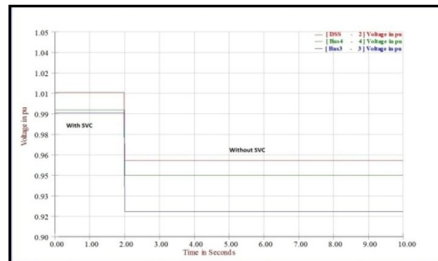


Figure 10: Voltage profile at different bus of the system

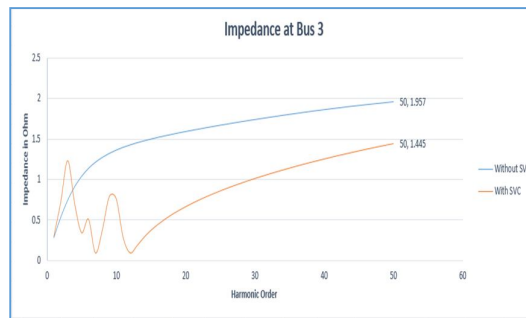


Figure 11: Impedance plot at bus-3 for with and without SVC

TABLE II: HARMONIC DISTORTION COMPARISON WITH IEEE-519 STANDARD

Location	Bus voltage (kV)	IEEE 519 permissible limit (%)	% VTHD	
			without SVC	With SVC
Bus 6	0.415	5	1.86	0.38
Bus 4	11	5	4.14	3.54
Bus 3	11	5	2.90	0.40
Bus 2	33	5	2.45	1.49

VI. CONCLUSION

In this paper, the basic structure of an SVC and its operation has been discussed. Also its impact on power quality and subsequent power quality improvement are presented. A simple distributed generation system with a typical solar plant is modelled with its characteristics and simulated. The results are analyzed and compared with IEEE standards. From all the observations made after the simulations we can clearly conclude that use of SVCs in Distributed Generation systems will enhance the quality and the reliability of power.

REFERENCES

- [1] N.G.Hingorani, and L. Gyugyi, "Understanding FACTS: concepts and technology of flexible ac transmission systems," IEEE Press, NY, 1999.
- [2] Y. H. Song, and A. T. Johns, "Flexible AC transmission system (FACTS)," IEEE Power and Energy Series 30, London, U.K., 1999.
- [3] "FACTS application," FACTS application task force, IEEE Power Engineering Society, 1998.
- [4] J. J. Paserba, "How FACTS controllers benefit AC transmission systems," IEEE Power Engineering Society General Meeting, Denver, Colorado, 6-10 June 2004.
- [5] T.J.E. Miller, Reactive Power Control in Electric Systems. Wiley & Sons, New York, (1982).
- [6] A.E. Hammad, "Comparing the voltage control capabilities of present and future VAR compensating techniques in transmission systems," IEEE Trans. Power Delivery, vol.11, no.1, pp. 475- 484, Jan. 1996.
- [7] J. Verseille, Convenor, CIGRE task force 39.02, "Voltage and reactive control," Electra No.173, pp. 115-143, Aug. 1997
- [8] The IEEE 1531 "IEEE Guide for Application and Specification of Harmonic Filters"